

STEP 1 Do you want a built-in or remote power supply?

Things to keep in mind when selecting power supply type: For a tunable-white lighting option, select a Remote power supply.

BUILT-IN POWER SUPPLY

Single-white DV Series

Built-in power supply and rocker switch in each fixture (available in standard lengths only)

- Built-in power supply
- Rocker switch included on each fixture
- 4-watts per foot for single-white LED lighting
- Direct replacement for fluorescent fixture (no additional wiring)
- 15-amp tamper-resistant receptacles
- Available only in standard fixtures—no custom options
- Use an electronic low-voltage dimmer for lighting control

REMOTE POWER SUPPLY

Single-white RM Series

Remote power supply is installed in accessible location near fixtures (custom options available)

- Remote power supply (ordered separately)
- 6-watts per foot for single-white LED lighting
- Best for powering multiple Lighted Power Strip Fixtures that are in close proximity
- 15-amp tamper-resistant receptacles
- Customize with additional receptacles and switches, custom lengths, and receptacle/switch placement—call Design Services at 866-848-9094 for custom orders

Tunable-white RM Series

Remote power supply is installed in accessible location near fixtures (custom options available)

- Remote power supply (ordered separately)
- 6-watts per foot for tunable-white LED lighting
- 15-amp tamper-resistant receptacles
- Customize with additional receptacles and switches, custom lengths, and receptacle/switch placement—call Design Services at 866-848-9094 for custom orders
- Find more information on tunable-white lighting on page 12

STEP 2 Select the desired standard length for the fixture

Things to keep in mind when selecting fixture length: The Single-white RM and Tunable-white RM fixtures are offered in longer lengths and custom lengths.

Single-white DV Series

Built-in power supply and rocker switch in each fixture; single-color lighting (available in standard lengths only)

- 10-1/2" (267 mm) **LP10QD2NDColorFinishTemp**
- 12-1/2" (318 mm) **LP12QD4NDColorFinishTemp**
- 18-1/2" (470 mm) **LP18QD6NDColorFinishTemp**
- 24-1/2" (622 mm) **LP24QD8NDColorFinishTemp**
- 30-1/2" (775 mm) **LP30QD10NDColorFinishTemp**
- 36-1/2" (927 mm) **LP36QD12NDColorFinishTemp**

Single-white RM Series




Remote power supply is installed in accessible location near fixture; single-white lighting (custom options available)

- 10-1/2" (267 mm) **LP10HR3NDColorFinishTemp**
- 12-1/2" (318 mm) **LP12HR6NDColorFinishTemp**
- 18-1/2" (470 mm) **LP18HR9NDColorFinishTemp**
- 24-1/2" (622 mm) **LP24HR12NDColorFinishTemp**
- 30-1/2" (775 mm) **LP30HR15NDColorFinishTemp**
- 36-1/2" (927 mm) **LP36HR18NDColorFinishTemp**
- 42-1/2" (1080 mm) **LP42HR21NDColorFinishTemp**
- 48-1/2" (1232 mm) **LP48HR24NDColorFinishTemp**
- 60-1/2" (1537 mm) **LP60HR30NDColorFinishTemp**
- 72-1/2" (1842 mm) **LP72HR36NDColorFinishTemp**

Tunable-white RM Series

Remote power supply is installed in accessible location near fixture; tunable-white lighting (custom options available)

- 10-1/2" (267 mm) **LP10-T6R5W-ColorFinishTemp**
- 12-1/2" (318 mm) **LP12-T6R6W-ColorFinishTemp**
- 18-1/2" (470 mm) **LP18-T6R9W-ColorFinishTemp**
- 24-1/2" (622 mm) **LP24-T6R12W-ColorFinishTemp**
- 30-1/2" (775 mm) **LP30-T6R15W-ColorFinishTemp**
- 36-1/2" (927 mm) **LP36-T6R18W-ColorFinishTemp**
- 42-1/2" (1080 mm) **LP42-T6R21W-ColorFinishTemp**
- 48-1/2" (1232 mm) **LP48-T6R24W-ColorFinishTemp**
- 60-1/2" (1537 mm) **LP60-T6R30W-ColorFinishTemp**
- 72-1/2" (1842 mm) **LP72-T6R36W-ColorFinishTemp**

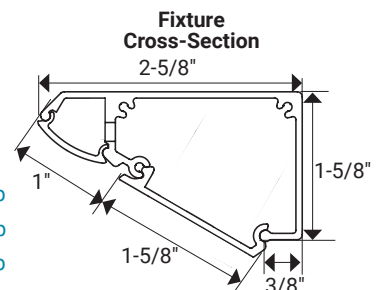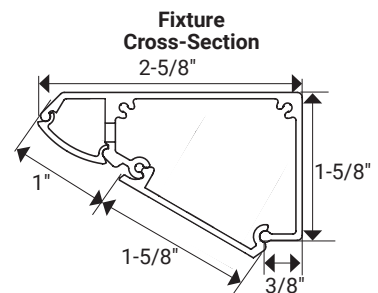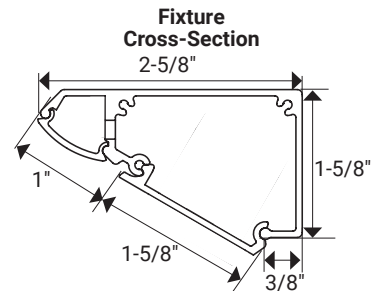

STEP 3 Select the finish option with coordinating receptacle color

Things to keep in mind when selecting a finish: Blend with backsplash color to reduce fixture visibility, coordinate with cabinet color, or match nearby hardware.

Single-white DV Series
Finish options with coordinating receptacle color (18-1/2" fixture shown)



Black (B) receptacles, Black (BK) finish, Black switch



Black (B) receptacles, Bronze (BZ) finish, Black switch



Grey (G) receptacles, Satin Nickel (SN) finish, Grey switch



White (W) receptacles, White (WT) finish, White switch

Single-white RM Series
Finish options with coordinating receptacle color (18-1/2" fixture shown)

NOTE: If a different finish/receptacle color pairing is desired, call Design Services at 866-848-9094.



Black (B) receptacles, Black (BK) finish



Black (B) receptacles, Bronze (BZ) finish



Grey (G) receptacles, Satin Nickel (SN) finish



White (W) receptacles, White (WT) finish

Tunable-white RM Series
Finish options with coordinating receptacle color (18-1/2" fixture shown)

NOTE: If a different finish/receptacle color pairing is desired, call Design Services at 866-848-9094.



Black (B) receptacles, Black (BK) finish



Black (B) receptacles, Bronze (BZ) finish



Grey (G) receptacles, Satin Nickel (SN) finish



White (W) receptacles, White (WT) finish

STEP 4 Select a Kelvin temperature to fit the space

Things to keep in mind when selecting Kelvin temperature: if you're unsure of the temperature needed, tunable-white lighting allows you to change the white light AFTER everything is installed.

Warm White 2700K

Produces a warm and inviting color of light. It is generally the color of incandescent lighting. Choose 2700K to complement brown woods or warm colors such as red, gold, or orange. Copper, gold, brass, and bronze hardware pair well with this color temperature.



Soft White 3000K

This is a soft, neutral warm color. It's preferred for complementing natural wood, warm grey, and ivory. Bronze, satin nickel, and gold hardware pair perfectly with this color temperature.



Cool White 4000K

Creates a cool and vibrant color of illumination. It's preferred in kitchens and working areas and provides a crisp look for blue, green, and white colors. Gunmetal, pewter, and satin nickel hardware pair nicely with this light temperature.



Daylight White 5000K

This is considered sunlight at high noon. It has a stark white or bluish appearance. This invigorating color works great in spaces that require bright light or in commercial applications. Satin nickel, chrome, and black hardware pair nicely with this light temperature.



Still unsure what white light temperature would look best?

Call our dedicated (and free!) **Design Services team** at **866-848-9094** to help select the white light temperature your design will look best in.



LIVE SUPPORT!

Understanding Tunable-white Lighting for Lighted Power Strip

Choose Warm White, Daylight White, and any white color in between AFTER the cabinets and Lighted Power Strip Fixtures are installed.



Select the white light Kelvin temperature AFTER cabinets and lighting are installed

The Tunable-white RM Series Lighted Power Strip uses Task Lighting's patented, two-wire TandemLED™ Technology. After the Lighted Power Strip is installed, tune the white light to match the color scheme of a room, set a mood, or mirror natural lighting to synchronize with the body's circadian rhythm at any time. Enjoy a full range of brightness control at any temperature, and quickly create a personalized lighting experience at the click of a button or by the sound of your voice with a compatible smart home hub.



Adjust the white light based on your mood or activities

Easily tune the white light from Warm White to Daylight White and all shades of white in between at any time!